

0.1 Nm /s

Low measurement limit
1:2500 Turndown ratio



The Explosion-proof Certification
applicable to various harsh
working conditions



Full-digital Signal Processing
Eliminates zero point drift



Intelligent diagnosis prevent
the sensor from being
polluted and damaged



VC211x-Ex & VC212x-Ex Series Thermal Mass Flow Meter

Explosion-proof Thermal Mass Flow Meter



THE THERMAL MASS FLOW METER

Product Overview

VC211x-Ex & VC212x-Ex flow meter is based on thermal measurement technology. It can measure the standard flow, mass flow, consumption, and gas temperature directly.

Explosion-proof structure design, having certificate issued by the state:
Explosion-proof class: Ex db IIC T6 Gb / Ex tb IIIC T80°C Db Protection code: IP67

No moving parts, stable signal, vibration proof, high reliability, long-term measuring accuracy

Full-digital signal processing is used instead of the conventional analog bridge design, resulting in a wider range and more accurate measurement.

The low measuring limit can reach 0.1Nm/s, and the turndown ratio can reach 1:2500. It has a wider measuring range than common flow meters on the market, making it suitable for measuring extremely volatile flow, low-flow bypass, and the gas consumption of single equipment.

With the innovative, intelligent diagnosis technology, it can sense the sensor pollution online and protect the sensor from overheating

Product Advantages



Low Measuring Lower Limit

The low measuring limit can reach 0.1 Nm/s



Full-digital Signal Processing

Eliminates zero point drift and provides highly accurate measurements



The Explosion-proof Certification


Ex db IIC T6 Gb
Ex tb IIIC T80°C Db




Protection Code IP67

- Full-digital signal processing, higher accuracy, long-term stability
- Based on the thermal flow measurement principle, it's not required to compensate gas pressure and temperature, integrated temperature measurement
- With an ultra-wide 1:2500 turndown ratio, the measuring range is from 0.1 Nm/s to 250 Nm/s
- Explosion-proof class: Ex db IIC T6 Gb / Ex tb IIIC T80°C Db Protection code: IP67
- The capacitive touch 2.0" IPS LCD with an ultra-wide view
- Bluetooth function for wireless flowmeter configuration and data transmission
- Standard Modbus RTU (RS485) interface, 4 to 20 mA current and pulse output
- Insert type **VC211x-Ex**: Suitable for pipes with diameters from DN20 to DN1000, and can be installed under pressure via a 1/2" ball valve.
- Pipe type **VC212x-Ex**:
Pipe size: DN15, DN20, DN32, DN40, DN50, DN65, DN80
The process for connection: R-type thread, Flange EN1092-1, ANSI / B16.5


Product Dimensions

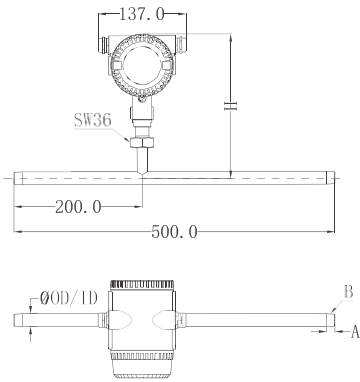

VC212x-Ex
Thread-type dimension schematic

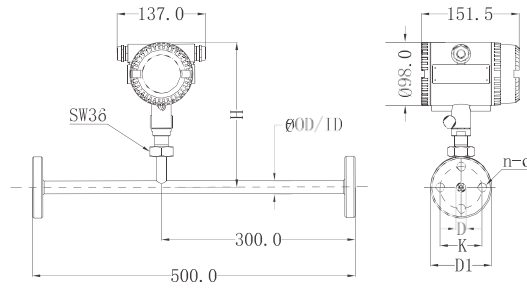

VC212x-Ex
Flange-type dimension schematic

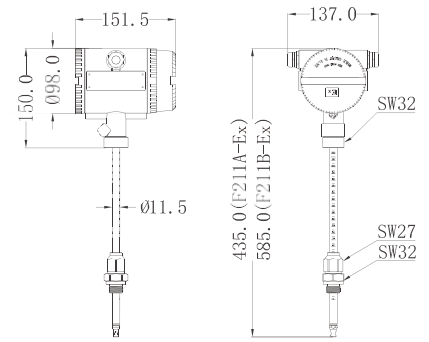

VC211x-Ex
Dimension diagram

VC212x-Ex Detailed dimension of thread-type

DN	Inch	A Thread length (mm)	B Male thread (mm)	H Pipe center to top of housing (mm)
15	1/2	≥13.2	R1/2"	226
20	3/4	≥14.5	R3/4"	225
25	1	≥16.8	R1"	224
32	1 ¹ / ₄	≥19.1	R1 ¹ / ₄ "	226
40	1 ¹ / ₂	≥19.1	R1 ¹ / ₂ "	226
50	2	≥23.4	R2"	226

VC212x-Ex Detailed dimension of flange-type

DN	(Inch)	D Pipe inner diameter (mm)	D1 Flange outer diameter (mm)	K Screw hole center distance (mm)	H Pipe center to top of housing (mm)	n Number of flange holes	d Screw ole diameter (mm)
15	1/2	15	95	65	226	4	14
20	3/4	20	105	75	225	4	14
25	1	25	115	85	224	4	14
32	1 ¹ / ₄	32	140	100	226	4	18
40	1 ¹ / ₂	40	150	110	226	4	18
50	2	50	165	125	226	4	18

Measuring Range

VC211x-Ex Measuring Range

(Inch)	DN	ID (mm)	Min Flow (Nm ³ /h)	Max Flow -Std (Nm ³ /h)	Max Flow -High (Nm ³ /h)
3/4	20	20	0.1	135	282
1	25	25	0.2	212	441
1 ^{1/4}	32	32	0.3	347	723
1 ^{1/2}	40	40	0.5	542	1131
2	50	50	0.7	848	1767
2 ^{1/2}	65	65	1.2	1433	2986
3	80	80	1.8	2171	4523
4	100	100	2.8	3392	7068
5	125	125	4.4	5301	11044
6	150	150	6.4	7634	15904
8	200	200	11.3	13571	28274
10	250	250	17.7	21205	44178
12	300	300	25.4	30536	63617

* For more pipe sizes and flow ranges, please consult sales

VC212x-Ex Measuring Range

(Inch)	DN	ID (mm)	Min Flow (Nm ³ /h)	Max Flow (Nm ³ /h)
1/2	15	15	0.06	76
3/4	20	20	0.1	135
1	25	25	0.2	212
1 ^{1/4}	32	32	0.3	347
1 ^{1/2}	40	40	0.5	542
2	50	50	0.7	848
2 ^{1/2}	65	65	1.2	1433
3	80	80	1.8	2171

* For more pipe sizes and flow ranges, please consult sales

Technical Data

Flow	
Measuring Range	0(0.1) ... 250 Nm/s
Accuracy	±(1.5% RD + 0.3% FS) [1% RD Option]
Sampling Rate	>20 Samples/sec
Medium	Compressed air, nitrogen, oxygen, carbon dioxide and other non-condensing gases
Reference Condition	20 °C, 1 bar(a) -ISO 1217 (Configurable)
Output	
4~20 mA Output (Standard)	Flow rate/Temperature (Configurable)
Pulse Output (Standard)	Consumption/Alarm
Digital Output (Standard)	Modbus RTU (RS485)
Wireless Communication	Bluetooth (Standard) Wi-SUN / IOT-4G (Option, choose one of two)
Connector	Wiring Terminal
Power	
Power	18 ... 30VDC 5W @ 24VDC

Display	
Display	2.0" IPS LCD with capacitive touch
Operating Environment	
Environment Temperature	-30 ... +60 °C
Medium Temperature	-40 ... +80 °C
Operating Pressure	VC211x-Ex: 0 ... 1.7 MPa(a) VC212x-Ex: 0 ... 1.7 MPa(a)(4.0 / 6.3 MPa.a Option)
Explosion-proof Class & Protection Code	
Explosion-proof Class	Ex db IIC T6 Gb/Ex tb IIIC T80°C Db
Protection Code	IP67
Other	
Process Connection	G1/2" (ISO 228-1) (VC211x-Ex Insert type)Compliant with IEC 61326-1
Pole / Pipe Section	SUS304 (Standard)
Material	SUS316 (Option)

Order Information

Model	Process Conn.	Digital Output	Analog Output	Wireless Comm.	Flow range	Gas type	Accuracy	Monitor	Description
VC211A-Ex									Explosion-proof Thermal Mass FlowMeter, Insert type, 250 m m pole length (Suitable for pipe diameter up to DN250)
VC211B-Ex									Explosion-proof Thermal Mass FlowMeter, Insert type, 400 m m pole length (Suitable for pipe diameter up to DN600)
VC211C-Ex									Explosion-proof Thermal Mass FlowMeter, Insert type, 600 m m pole length (Suitable for pipe diameter up to DN1000)
	1								ISO G1/2" Screw
		1							Modbus RTU (RS485)
			1						4 ... 20 mA + Pulse Output
					V0013 0001				None (Default)
					S1701 0010				IOT-4G Module
					S1701 0023				Built-in Wi-SUN Sub-module, 470 frequency band, mainly suitable for China
					S1701 0024				Built-in Wi-SUN Sub-module, 915 frequency band, mainly suitable for Asia, America and Australia
					S1701 0025				Built- in Wi-SUN Sub-module, 868 frequency band, mainly suitable for Europe and the Middle East
					V0205 0002				Standard Range (0~120 Nm/s)
					V0205 0003				Extended Range (0~250 Nm/s)
					V0202 0001				Air
					V0202 0002				Oxygen (O3)
					V0202 0003				Nitrogen (N3)
					V0202 0004				Hydrogen (H3), Real Gas Calibration
					V0202 0005				Nitrous Oxide (N3O)
					V0202 0006				Carbon Dioxide (CO3)
					V0202 0007				Natural Gas (NG)
					V0202 0008				Argon (Ar)
					V0202 0009				Helium (He), Real Gas Calibration
					V0202 0010				Other Specified Gases (Specify Gas or Gas Mix)
					V0204 0001				Standard Accuracy Calibration ±(1.5% RD + 0.3% FS)
					V0204 0002				High Accuracy Calibration ±(1% RD + 0.3% FS)
								S0105 0003	Integrated display. The capacitive touch 2.0" IPS LCD with an ultra-wide view
								S0105 0003A	Split display. The capacitive touch 2.0" IPS LCD with an ultra-wide view

* For more pole length, please consult sales

* Portable protective case is available as an option. Please consult sales staff for details

* Built-in 4G or Wi-SUN module, not compatible with explosion-proof function

* There are difference in regulations and standards between countries and regions. Please select according to the local Wi-SUN frequency band

Order Information

Model	Digital Output	Analog output	Wireless Comm.	Process Connection	Gas type	Accuracy	Monitor	Description
VC212A-Ex								Explosion-proof Thermal Mass Flow Meter, Inline type, Max pressure: 1.7 MPa(a)
VC212B-Ex								Explosion-proof Thermal Mass Flow Meter, Inline type, Max pressure: 4.0 MPa(a)
VC212C-Ex								Explosion-proof Thermal Mass Flow Meter, Inline type, Max pressure: 6.3 MPa(a)
	1							Modbus RTU (RS485)
		1						4 ... 20 mA + Pulse output
			V0013 0001					None (Default)
			S1701 0010					IOT-4G Module
			S1701 0023					Built-in Wi-SUN Sub-module, 470 frequency band, mainly applicable to China
			S1701 0024					Built-in Wi-SUN Sub-module, 915 frequency band, mainly suitable for Asia, America and Australia
			S1701 0025					Built- in Wi-SUN Sub-module, 868 frequency band, mainly suitable for Europe and the Middle East
			V0207 0001					R thread (ISO-7-1), DN15, 1/2"
			V0207 0002					R thread (ISO-7-1) , DN20, 3/4"
			V0207 0003					R thread (ISO-7-1), DN25, 1"
			V0207 0004					R thread (ISO-7-1), DN32, 1.25"
			V0207 0005					R thread (ISO-7-1), DN40, 1.5"
			V0207 0006					R thread (ISO-7-1), DN50, 2"
			V0207 0023					R thread (ISO-7-1), DN65, 2.5"
			FLG-15					Flange (EN 1092-1), DN15, 1/2"
			FLG-20					Flange (EN 1092-1), DN20, 3/4"
			FLG-25					Flange (EN 1092-1), DN25, 1"
			FLG-32					Flange (EN 1092-1), DN32, 1.25"
			FLG-40					Flange (EN 1092-1), DN40, 1.5"
			FLG-50					Flange (EN 1092-1), DN50, 2"
			FLG-65					Flange (EN 1092-1), DN65, 2.5"
			FLG-80					Flange (EN 1092-1), DN80, 3"
			V0202 0001					Air
			V0202 0002					Oxygen (O3)
			V0202 0003					Nitrogen (N3)
			V0202 0004					Hydrogen (H3), Real Gas Calibration
			V0202 0005					Nitrous Oxide (N3O)
			V0202 0006					Carbon Dioxide (CO3)
			V0202 0007					Natural Gas (NG)
			V0202 0008					Argon (Ar)
			V0202 0009					Helium (He), Real Gas Calibration
			V0202 0010					Other Specified Gases (Specify Gas or Gas Mix)
			V0204 0001					Standard Accuracy Calibration $\pm(1.5\% \text{ RD} + 0.3\% \text{ FS})$
			V0204 0002					High Accuracy Calibration $\pm(1\% \text{ RD} + 0.3\% \text{ FS})$
						S0105 0003		Integrated display. The capacitive touch 2.0" IPS LCD with an ultra-wide view
						S0105 0003A		Split display. The capacitive touch 2.0" IPS LCD with an ultra-wide view